


3P HOUSING FILTERS WITH FLASH VALVE

The peculiarity of this model is the drain valve. The raindrop shape of the bowl is designed to expel all collected sediments completely. A grid at the bottom of the bowl creates a collection tank, keeping the filter cartridge clean from floating sediments; this guarantees full efficiency in filtration and allows for quick elimination of the collected dirt.

KEY FEATURES


- Drop style bowl to better flushing sediments off
- Twistable drain accessory for easy installation and longer lifetime
- Less pressure drop through star-like head design
- Compatible with three cartridge designs: DOE, BIG, COD3
- Smart placement of wrench in the bracket avoids its loss

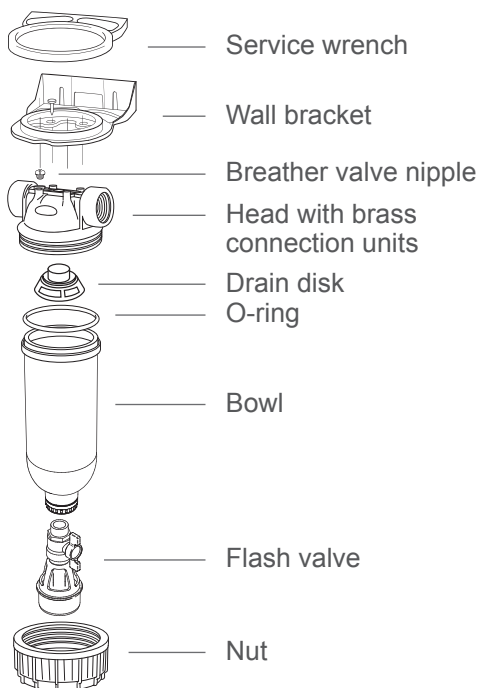

DATA SHEET

Head	PP with brass connection units
Nut	Nut in PA
Bowl	PET*
O-ring	EPDM
Max working pressure	8 bar
Max working temperature	From 5°C (41°F) to 50°C (122°F)
Bracketing	Horizontal
Fastening	Axle base fixing hole 40x32 mm hole for screws 3 mm
Connection	Screw thread in inch
Package	Empty housing without filter cartridge

made in 
ITALY



Code	IN/OUT threads	Size	Z	X	Y
FCPP3P0530	3/4"	9" 3/4	35.0 cm	12.5 cm	11.1 cm
FCPP3P0550	1"	9" 3/4	35.5 cm	12.5 cm	11.1 cm

Code	Description	Gross weight, kg	Unit packing dimensions, m			Pieces in box	Pieces on pallet
			Length	Width	Height		
FCPP3P0530	3P housing ECO 9" 3/4 – 3/4" transparent PET bowl with venturi valve + drain 1/2"					6	216
FCPP3P0550	3P housing ECO 9" 3/4 – 1" transparent PET bowl with venturi valve + drain 1/2"						

*Polyethylene terephthalate