

BACK WASH FILTER ASSY WITHOUT MEDIA

Pre-configured and assembled systems with correctly installed valve components. All you need to do is add the sorption material.

KEY FEATURES:

- Ready for activated carbons and iron removal materials
- Designed for convenient and quick installation

COMPONENTS:

Clack® valve assembly:

- Clack® CE control valve
- DLFC
- Top stack distributor
- Power supply
- Funnel
- Valve instruction manual, Instruction manual

FRP tank assembly:

- FRP tank
- Adaptor
- Rise
- Bottom stack distributor

PHYSICAL PARAMETERS

Inlet, outlet	G 1,5"
Drine	G 1,25"
Brine line	G 3/8"
Operating pressure	2 - 6 bar
Operating temperature	+4...+30 °C
Electrical requirements	230 V, 50 Hz
Electrical power	30 W
Volume of pressure tank	450 L
The volume of the rounded side	46 L
Dry system weight	52 kg



Softener assy w/o media, 1.5" CE valve

Code	Product	Water flow rate**	
		Service, m ³ /h (pressure drop 1 bar)	Backwash, m ³ /h (pressure drop 1,7 bar)
BF2472CE15	Backwash filter assy 24x72, 1.5" CE valve	15,9	11,8

**Only for Clack WS1.5 CE control valves includes meter

ACCESSORIES**

Code	Description
V3017	WS2 Service or Fill Switch Assembly
V3097BSPT	WS1.5" No Hard Water Bypass Male x Female BSPT
V3071BSPT	MAV 1.5 BSPT Revision 2
V3040BSPT-15	WS1.5 Meter Assembly Male x Female NPT 15' Meter Cable

** Not included in the basic set.
Can installed as additional equipment

RECOMMENDED MEDIA VOLUME

Code	Description	Volume
CENT1240	Granular activated carbon Centaur 12x40	105 kg
FILTR300	Activated Carbon Filtrasorb 300	125 kg
A8023	Filter-AG PLUS media	226,4 L
A8014	Filter-AG material	226,4 L
A8006	Birm filter media	226,4 L

The volume of filter material depends on the its characteristics.
TDS on filter materials can be found on the official website www.ecosoft.com.

CONFIGURATIONS



TWIN

TWIN ASSEMBLY PARTS

1. BF2472CE15 - 2 pcs.
2. V3071BSPT - 1 pcs.
3. Filter media¹

Twin set may operate 2 units with alternative mode (the first unit in operation, the second - in regeneration or stand by) and can produce water during the day at constant flow rate.

KEY FEATURES

- Ensures stable water quality with constant flow
- User friendly installation
- Doesn't create hydraulic shocks



2 - 6 SYSTEMS

DUPLEX ASSEMBLY PARTS

1. BF2472CE15 - 2 pcs.
2. DUPECO15 - 1 pcs.
3. Filter media¹

Duplex set may operate 2 units parallel and can provide double flow rate during peak consumption.

KEY FEATURES

- Double flow rate for peak consumption
- User friendly installation
- Doesn't create hydraulic shocks



SET FOR 2...6 UNITS WITH CLACK SYSTEM CONTROLLER

1. BF2472CE125 - 2...6 pcs.
2. Filter media¹
3. WSSYSTCON2* - 1 pcs.

The Clack system controller may operate 2 - 6 units and has 4 operating modes that ensure efficient operation of the set for various needs.


KEY FEATURES

- System Controller may operate 2 - 6 units or be used as a water monitor only
- Clack 1.0", 1.25", 1.5" or 2" control valves may be used
- 4 available operating modes: Progressive flow, Alternator, Series, Random


WSSYSTCON2* - includes a kit for connecting 2 systems. The last number indicates the number of possible connected systems

¹ See "Recommended media volume"

CONNECTIONS

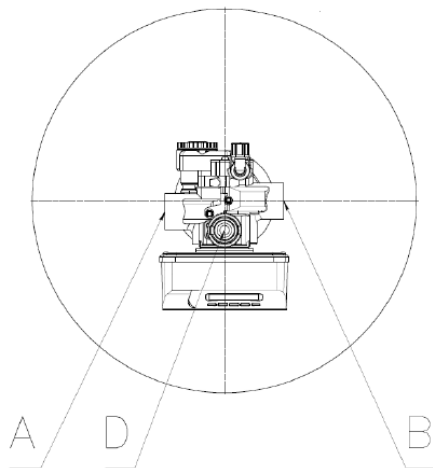

Marking	Nomenclature	Connection	Height
A	Inlet	PH G 1,5"	2175±30
B	Outlet	PH G 1,5"	2175±30
D	Drain	PH G 1"	2370±30

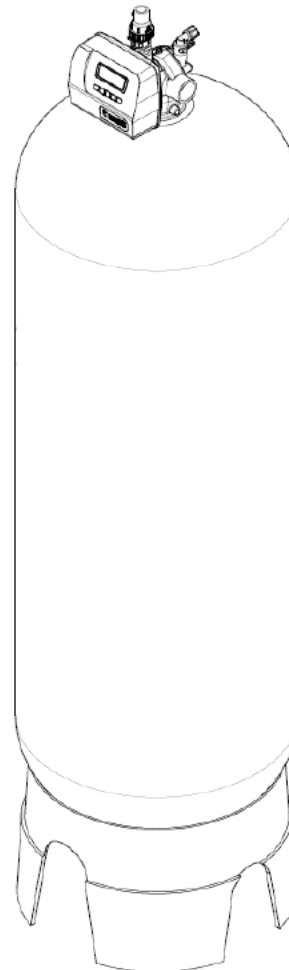

DIMENSIONS OF SYSTEM

