

3P TRIPLEX HOUSING FILTERS


The 3P housing is designed for water purification for residential and commercial applications.

The bowl is made of PET material, which guarantees reliability and durability.

Equipped with a plastic breather valve.

KEY FEATURES


- A 2 mm belt on a bowl helps center the head for easy assembling and better pressure resistance
- Less pressure drop through "star-like" head design
- Compatible with three cartridge designs: DOE, BIG, COD3
- Smart placement of the wrench in the bracket avoids its loss

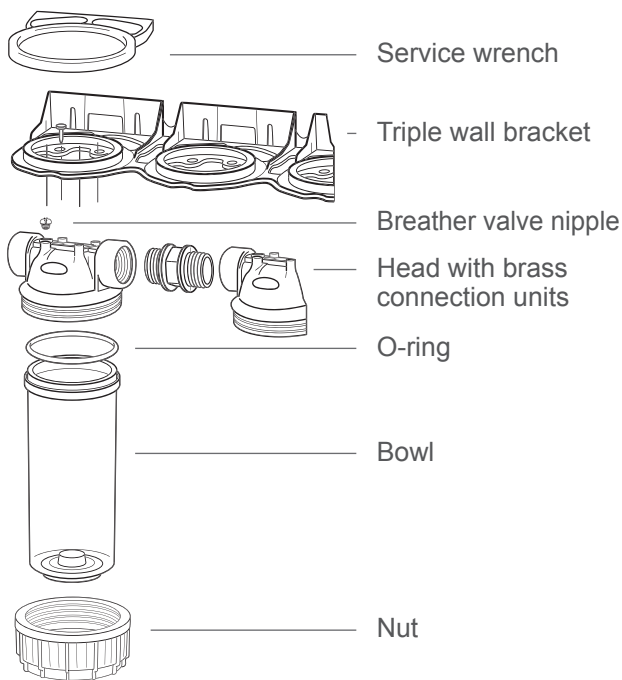

DATA SHEET

Head	PP with brass connection units
Nut	Nut in PA
Bowl	PET*
O-ring	EPDM
Max working pressure	8 bar
Max working temperature	From 5°C (41°F) to 50°C (122°F)
Bracketing	Horizontal
Fastening	Axle base fixing hole 40x32 mm hole for screws 3 mm
Connection	Screw thread in inch
Package	Empty housing without filter cartridge

made in 
ITALY



Code	IN/OUT threads	Size	Z	X	Y	D
FTPP3P0130	3/4"	9" 3/4	29.6 cm	40.1 cm	11.1 cm	33.0 cm
FTPP3P0110	1"	9" 3/4	29.6 cm	40.1 cm	11.1 cm	33.0 cm

Code	Description	Gross weight, kg	Unit packing dimensions, m			Pieces in box	Pieces on pallet
			Length	Width	Height		
FTPP3P0130	3P housing ECO 9" 3/4 TRIPLEX – 3/4" transparent PET bowl	3.2	0.405	0.16	0.35	5	90
FTPP3P0150	3P housing ECO 9" 3/4 TRIPLEX – 1" transparent PET bowl						

*Polyethylene terephthalate